


DOCUMENT
ONLINE




Stencil perfection


Sales range screen printing

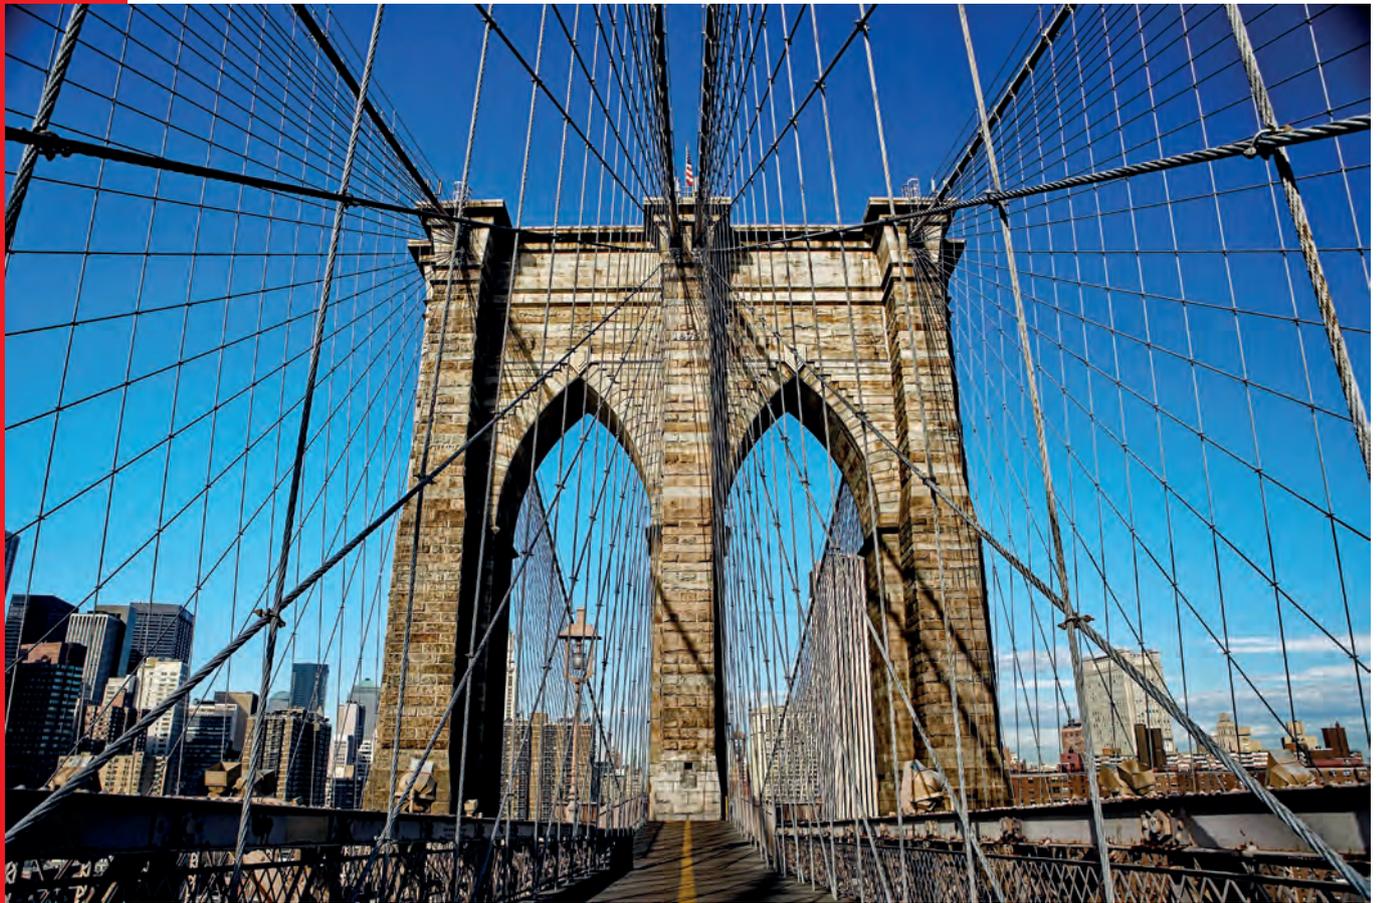

ulano

Table of contents

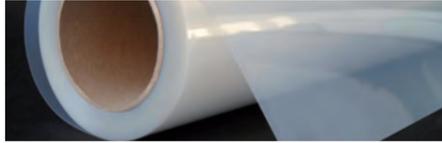	01 Pre-Press & Stencil making	4
	02 Mesh pre-treatment	5
	03 Photoemulsions	6
	04 Capillary films	9
	05 Screen Fillers	10
	06 Masking films	10
	07 Screen cleaning	11
	08 Screen decoating	12
	09 Mesh post-treatment	13

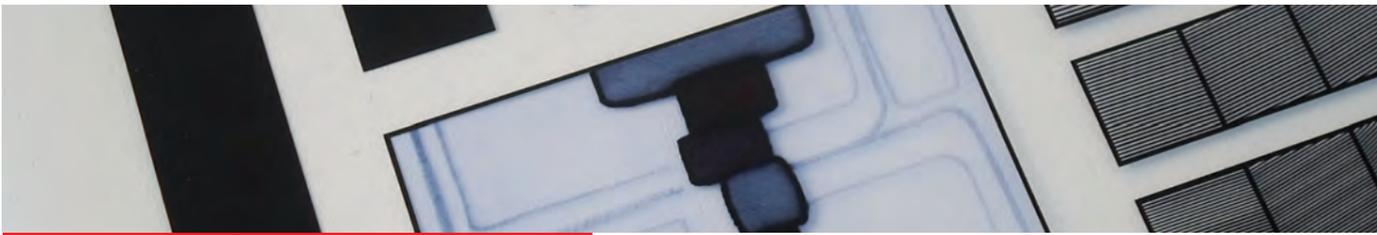


01 Pre-Press & Stencil making

Pre-Press

Pigment Inkjet Film

Films for water-based pigment and dye inks. Instant-dry ink receiving layer. Has the ability to operate in full daylight conditions and is compatible with industry standard pigment or dye inkjet printers.

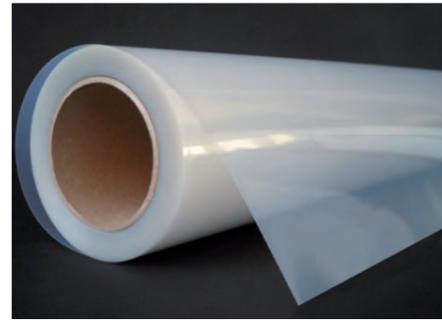

Stencil making

Frame Adhesive Fast

A two-component screen adhesive for a highly chemical resistant bonding of screen meshes to frames made from aluminum, steel, wood and galvanized iron frames. It can easily be applied by brush. Frame Adhesive Fast is fast drying and after curing resistant to almost all screen printing inks and most cleaning agents. The adhesive film does not embrittle and does not cut the mesh if some of the adhesive has been brushed into the screen surface.

Frame Adhesive Catalyst Fast


Frame Adhesive Catalyst Fast is a green coloured hardener for Frame Adhesive Fast.



02 Mesh pre-treatment

Magic Mesh Prep

Magic Mesh Prep is a ready-to-use liquid combining the properties of fabric degreaser, wetting agent, and antistatic treatment. It improves the flow characteristics of liquids, facilitating more uniform coating of direct emulsions and the easier transfer of ink during printing, thereby improving printed image quality. The improved wetting of fabric also promotes the adhesion of indirect and capillary films and improves the durability of all stencil systems, for longer printing runs. The antistatic properties of Magic Mesh Prep reduce the whiskering and feathering of ink when printing under low humidity conditions.

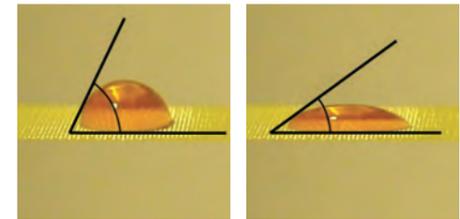

without

with

Degreaser Concentrate (1:50)

A highly concentrated, acidic degreasing concentrate. Diluted up to 1:50 with water, the ready-to-use cleaning solution has excellent degreasing and wetting properties and is suitable for any mesh type. Screen degreasing concentrate has especially been developed for automatic screen washing units. It produces little foam and is a phosphate-free tenside combination for the removal of grease and dirt.



Ulanogel No. 23

An abrasive degreaser gel that promotes better wetting of the fabric and adhesion of the stencil, and thus, longer press life. Its degreasing action removes dirt, dust, and oils from the fabric, reducing the risk of stencil failure and pinholing. Ulanogel No. 23 is ready-to-use and rinses off in hot or cold water. Its thixotropic character permits easy and effective preparation of larger screens held in a vertical position. Non-caustic - will not harm frames, fabric, or adhesives on stretch and glue frames. Recommended for use with all stencil systems on synthetic fabric only.



03 Photoemulsions

Dual-Cure emulsions

LX 660 Red / Blue

LX 660 is a versatile and durable diazo-photopolymer (dual-cure) emulsion with superior resistance to water-based ink systems, as well as many solvent-based inks. It is suitable for virtually all general purpose graphics and industrial applications. LX 660 is available in red and blue colour. Solids: 36%, Viscosity: 7.000 mPas.

LX 892 Violet


LX 892 Violet is used for the production of high-quality, water and solvent resistant screens for ceramics direct and textile printing stencils. The print run resistance can considerably be increased by chemical hardening with ULANO Hardener. Before hardening, LX 892 Violet is decoatable with ULANO Chemical Line products. Solids: 48%, Viscosity: 12.200 mPas.

Proclaim HR

Proclaim HR is a high resolution diazo-photopolymer (dual-cure) emulsion formulated to provide unequalled exposure latitude and ease of decoating, even if underexposed and used with aggressive inks and washup solvents. Proclaim HR is multi-purpose, fast exposing, and provides good acutance. It provides good stencil build per coat, excellent mesh bridging, and fast drying. Proclaim HR is very suitable for demanding graphics, electronics, and industrial applications. Solids: 35%, Viscosity: 7.500 mPas.

RLX

Multi-purpose diazo/acrylic photopolymer screen emulsion. RLX has broad exposure latitude, superior edge definition and resolution, and resistance to a wide variety of solvent- and water-based ink systems. RLX also possesses excellent coating properties, mesh bridging, stencil build per coat, drying speed, and durability. It has a high-contrast magenta color with superior resistance to humidity. Solids: 37%, Viscosity: 7.200 mPas.

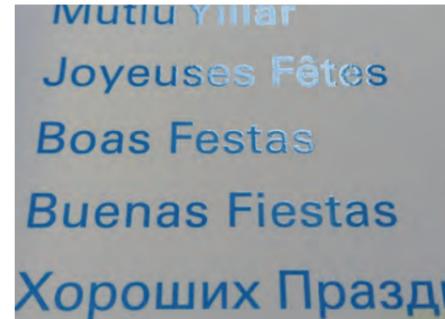

SBO emulsions

QX 5 Red / Blue

Universal, ready-to-use, ultra-fast-exposing SBO-photopolymer direct emulsion. Its high viscosity provides good coating control. Its high solids content results in better mesh bridging on coarse mesh, and fast drying. QX 5 is resistant to plastisol inks, most washup solvents, and some water-based inks, making it easy to reclaim in automatic stencil removal equipment or by hand. Stencils made with QX 5 are extremely durable and will not become tacky under high humidity conditions. It is formulated to reduce stencil-making time in shops with high stencil throughput and its fast exposure speed will also be of interest to low volume printers with weak light sources. Solids: 41%, Viscosity: 4.100 mPas.

QX 6

Universal SBO-dual cure emulsion with superior resolution for industrial graphics and electronics printing (PCB and conductive traces), compatible with UV and virtually all solvent-based inks. It is formulated for sensitivity to UV and near-UV-visible blue light, by means of UV-LED- and laser-based CTS-exposure. It can be also exposed with traditional metal halide light sources. QX-6 features very fast exposure speed, while offering excellent exposure latitude. It provides non-tacky surfaces, high humidity resistance, and good durability with easy reclamation. It features excellent resolution, good edge definition, and very good wet strength. Solids: 35%, Viscosity: 5.200 mPas.


Photoemulsions for textile printing

925 WR-P

925WR-P is a pale violet emulsion formulated for use with water-based textile inks. It produces tough stencils with total water resistance, as well as excellent resolution and superb edge definition. Screens made with 925 WR-P are easily reclaimable. Solids: 41%, Viscosity: 6.800 mPas.


QLT

QLT is a high-resolution, ready-to-use, fast-exposing SBO-photopolymer emulsion formulated for imprinted sportswear printing. Its high viscosity provides good coating control and its high solids content results in better mesh bridging on coarse mesh, and fast drying. Its high contrast blue color affords easy stencil inspection. QLT is resistant to plastisol inks and most washup solvents, making it easy to reclaim in automatic stencil removal equipment or by hand. Stencils made with QLT are extremely durable and will not become tacky under high humidity conditions. QLT is formulated to reduce stencil-making time (coating, drying, and exposure) in shops with high stencil throughput. Its fast exposure speed will also be of interest to low volume printers with weak light sources. To increase the water resistance, an optional diazo is available. Solids: 41,5%, Viscosity: 6.200 mPas.

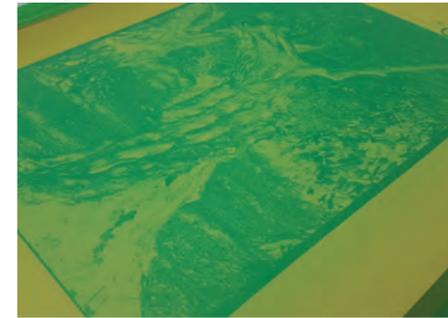

TRIFECTA

Trifecta is a ready-to-use, extremely fast exposing and durable, SBQ direct emulsion in violet color for garment, T-Shirt and sportswear printing. If properly exposed, Trifecta resists nearly all textile inks during short to medium runs. For longer printing runs, high resolution demand jobs and more aggressive inks, Trifecta stencils should be post-exposed. To achieve optimum durability, Trifecta stencils should be exposed and post-exposed with sufficient UV-light. Trifecta is formulated for compatibility with all computer-to-screen (CtS) systems as well as for conventional UV-light exposure. For maximum resolution and wider exposure latitude, yellow mesh usage is recommended with conventional exposure systems and with CtS exposure units.

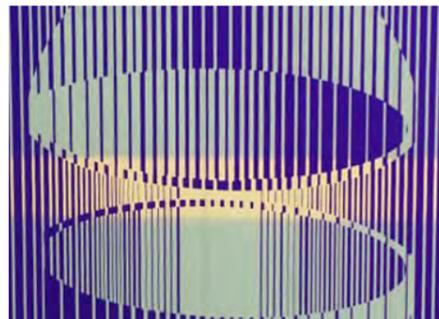

QTX

QTX is a red coloured, ready-to-use, ultra-fast exposing SBQ photopolymer direct emulsion formulated for imprinted sportswear applications. Its high solids content provides superior coating properties, better bridging of coarse mesh, and fast drying. QTX is designed for plastisol inks, is extremely durable and reclaims easily. Solids: 46%, Viscosity: 5.300 mPas.



QXO

QXO is a ready-to-use, extremely fast exposing SBQ-photopolymer direct emulsion formulated for imprinted sportswear printing. It resists plastisol inks—including newer, more aggressive, post-phthalate plastisols – and most washup solvents, making it exceptionally easy to reclaim in automatic equipment or by hand. It is formulated with a “masking color” that reduces light scattering – the major cause of loss of resolution. QXO is especially efficient with fixed or scanning LED units, as well as with fluorescent tubes or other low intensity light sources, or in shops that need high stencil making throughput. Solids: 43%, Viscosity: 5.300 mPas.

High-Density emulsions

QT-Thix


A red coloured, presensitized, extremely high viscosity emulsion for high density printing and other thick ink applications using plastisols, water-based or mild solvent inks. It's very high solids content is ideal for ultra-thick ink deposits. Even very thick, QT-Thix stencils hold print details very well. QT-Thix is easy to reclaim. Solids: 52%, Viscosity: 25.000 mPas.



04 Capillary films

CDF Vision (15, 18, 20, 25, 30, 35, 50)

CDF Vision is a green coloured diazo dual-cure capillary film. Its special formulation controls mesh penetration and enhances photo-polymerization, resulting in sharp printing shoulders and mechanical durability. Particulate-size control reduces granularity effects for optimal resolution and definition. Texturing agents impart a micro-structural pattern to the bottom of the stencil, minimizing hydrostatic attraction to the printing stock under conditions of high humidity, and electrostatic attraction under low humidity conditions. CDF Vision is compatible with UVs, vinyls, and virtually all solvent-based inks. Depending on the thickness selected, it is suited to such printing applications as: PCB and membrane switches, halftones, labels, ceramic decals, posters, Displays, bottles etc.

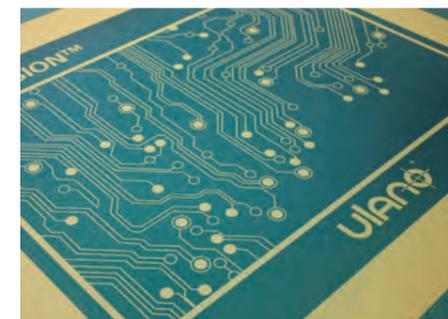

CDF QT-Thickfilm (100, 150, 200, 250, 300, 400)

CDF QT-Thickfilm is ideal for the production of thick stencils for specialty printing needs, including high density, puff, and lenticular effects for imprinted sportswear; peelable solder masks in the electronics industry; false mosaic and leading effects for glass and ceramic decorating, screen printed gaskets and seals; braille and many other manufacturing and decorating applications requiring ultra-thick ink deposits with non-aggressive solvent inks and pastes. CDF QT-Thickfilm is red coloured.



EZ-Film (30, 50)

EZ-Film is ideal for standard textile printing using conventional, non-aqueous garment printing inks. It is priced to be an economical alternative to direct emulsion in material cost and because it offers significant savings in labor and production time. EZ-Film 30 Red and EZ-Film 50 Orange are pure photopolymer (SBQ), pre-sensitized capillary films. EZ-Film 30 Red is appropriate for halftone work and EZ-Film 50 Orange is for general sportswear printing.





05 Screen Fillers

Screen Filler No. 65


Solvent resistant screen filler. It is used for retouching and blocking-out of solvent resistant stencils. It is fast drying and very quickly forms an elastic, very solvent resistant and abrasion resistant film.



06 Masking films

Universal Rubylith

Universal Rubylith is a red masking film, which is suited for use with orthochromatic films. It is "safe" for use with camera speed darkroom films as well as indirect gelatin stencil films and diazo, diazo acrylic, or SBQ sensitized stencil films or emulsions. Universal Rubylith is primarily used in the camera and plate making operations for offset lithography, flexography, gravure, and screen processes where orthochromatic films and plates are used. Rubylith has a single tack level and is coated as RU3 on 3 mil (75 µm) and RU5 on 5 mil (125 µm) polyester.

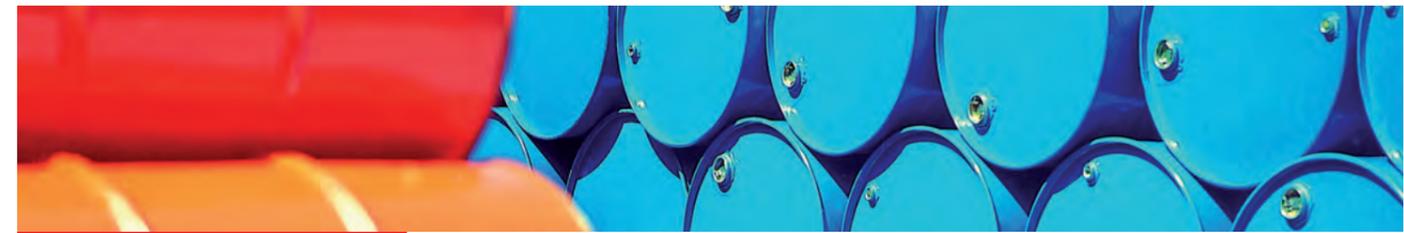

07 Screen cleaning

Manual cleaning

Press Wash

Solvent-based ink wash for manual usage "on-press-cleaning". Press Wash is a solvent blend that can be used to remove most screen process ink from screens, squeegees, printing tables etc. It has a mild odour, does not contain halogenated hydrocarbons, and will not affect most capillary films and direct emulsions.



Automatic cleaning

Cleanmatic MF 12-2

A non hazardous water dilutable ink wash for solvent based inks, UV inks, plastisols and water-based inks for manual use or use in automatic cleaning units. Cleanmatic MF-12-2 can be diluted up to 4 times with water when used for the removal of plastisol or UV inks. Mixed with Stripmatic CF, a non hazardous stencil remover concentrate for manual use or use in automatic cleaning units, it removes ink and emulsion in one step.

SV 8

An universally applicable screen cleaner for the removal of commonly use non-hardened inks from the screen mesh. Especially for the use in in-line cleaning units. SV 8 is biodegradable, very mild in odour, has a high flash point and can be used for a very long time in the cleaning bath. Among others SV 8 is especially suitable for cleaning UV and solvent based inks, as well as plastisols.



SV 61

A solvent-based washup solution formulated for use in automated screen cleaning equipment. It is effective in removing paper, UV, glass, plastisol, solvent based and ceramic inks. SV 61 can be used under vacuum and is also suitable for manual usage.



08 Screen decoating

Stencil Remover Paste No. 5

A ready-to-use paste for fast and thorough removal of direct emulsions and capillary films from all types of fabric including metalized polyester. Will not etch fabric; contains no strong alkalis or hypochlorides. Odor free. Thick consistency affords somewhat easier handling for larger screens.



Stripmatic CF (1:20)

A concentrated liquid (max. 1:20) formulated for use in automated equipment to remove direct emulsion and capillary films from screen. Stripmatic CF is acidified and contains special stabilizers to prevent the formation of precipitants if it is diluted in "hard water." It does not contain bleach, will not attack stainless steel, and has minimal effect on synthetic screen fabric. Stripmatic CF is odorless and colorless.



Stencil Remover Concentrate (1:50)

A highly efficient, liquid decoating concentrate (up to. 1:50) for the removal of direct emulsions and capillary films from screens. Stencil Remover Concentrate (1:50) has especially been developed for automatic screen decoating units and does not crystallize in the units or tanks due to special stabilizers. It has no attack on stainless steel. Stencil Remover Concentrate (1:50) solutions are colorless and without odor, chlorine free, have very little attack on the mesh and do not bleach.



09 Mesh Post Treatment

Actighost Rapid Gel

A viscous, alkaline screen cleaner utilizing biodegradable solvents. It is intended to be used after normal stencil decoating to remove any ink ghost images. It can also be used as an activator with oxidizing agents (such as Ulano Ghost Remover Advance) to remove emulsion residues. Actighost Rapid Gel is virtually odor free and has a high flash point. Its high viscosity facilitates its use on coarse mesh and its application to fabric using a coating trough or brush. In normal use, Actighost Rapid Gel is sufficiently diluted with water so that it can be flushed harmlessly down the drain and into biological sewage treatment facilities.





About ULANO

ULANO is recognized as a world-class leader in the screen printing and graphics arts industry. Our administrative and manufacturing facilities are in Wiesloch (Germany) and Brooklyn (USA) where we also have research and development laboratories, applications laboratories, and technical training centers.

ULANO specializes in the manufacture of stencil-making products and chemicals for screen process printing. We also supply masking films, inkjet media, automated coating equipment, and stencil evaluation tools.



Interested?

To find out more about ULANO and our range of products, please visit our website www.ulano.eu or contact us by phone or email.

Europe

ULANO

In den Ziegelwiesen 6
69168 Wiesloch
Germany

Phone +49 6222 578-0
Fax +49 6222 578-100

info@ulano.eu

USA

ULANO

1929 Marvin Circle
Seabrook, TX 77586
USA

Phone +1-281-474-9777
Fax +1-281-474-7325

info@ulano.com

